




# FS SERIES SWIVEL JOINTS

1 1/4" to 2" Stainless Steel Swivels to 70Bar (1,000PSI)

## Style 2

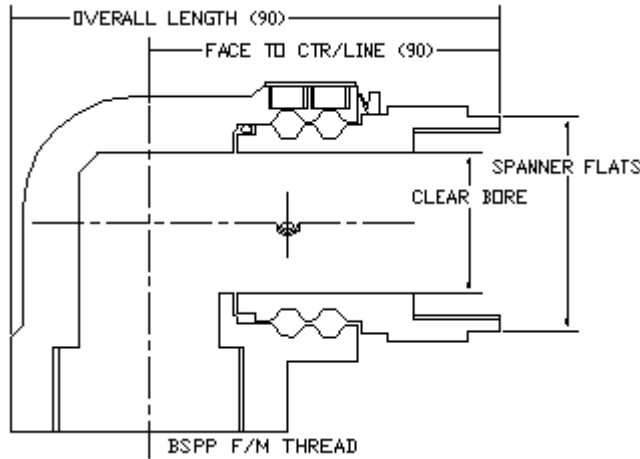

### FEATURES:

- 316 stainless steel construction for high corrosion resistance
- Seal and bearing designed to withstand high pressure.
- Double ball race design withstands loads in all directions
- Submerged modification available if unit are to be immersed.
- Ball bearing design requires less torque to turn than solid bearing design when under load.

Clear Bore	Thread BSPP	Size REF	Outer Diameter	Face to Centreline (90°)	Overall length (90°)
28	1 1/4"	32	62	92	123
34	1 1/2"	40	78	102	140
44	2"	50	85	110	151

These swivels have female threads at both ends as standard. Please enquire about any alternative threads which you may require. The swivel is made from 316L Stainless Steel, with 420 grade Stainless Steel Bearings. Standard seal types are listed below.

SERIES	STYLE	SIZE	SEAL	END TYPE
FS	1. (STRAIGHT)	32 (1 1/4")	1. NITRILE	1. BSPP THREAD
	2. (90 DEGREE)	40 (1 1/2")	3. EPR	
		50 (2")	4. FLUOROCARBON (VITON®)	
			5. PTFE	

Viton® is a registered trademark of DuPont Dow Elastomers.

For larger sizes please view our SK series brochures.

Also available in Hard Carbon Steel from our 'F' series Catalogue - Our low cost range, (1/4" to 2")

Copyright © 2016 Rotaflo FV LTD

## Rotaflo FV Limited

Rotec House, Bingswood Trading Estate, Whaley Bridge, High Peak, SK23 7LY  
 www.rotaflo.com tel:+44(0)1663 735003 fax:+44(0)1663 735006  
 email:sales@rotaflo.com

Tech Spec:  
 113/161020  
 Page 1 of 1